

QUATRO

WITH DECORATIVE FRONT PANEL

Features



- Wall and ceiling mounting.
- **Blauberg Quatro Bivolt** series models are equipped with specially designed motors compatible with both 127 V and 220 V power mains.
- Easy maintenance.
- Low-noise impeller.
- Continuous operation.
- Backdraft damper.
- Ball bearing motor.
- Available in metallic (Quatro Platinum), aluminium (Quatro Hi-Tech), chrome (Quatro Chrome) and gold (Quatro Gold) decorations.
- 5 year warranty.



Air flow:
up to 265 m³/h
74 l/s



Power:
from 14 W
SFP:
from 0.33 W/l/s



Noise level:
from 33 dBA



Platinum



Hi-tech Gold



Hi-tech Chrome



Hi-tech


Options




Model	Quatro 100/125/150				
Option	S	T	ST	H	SH
Pull-cord switch	•		•		•
Timer		•	•	•	•
Humidity sensor				•	•

- Turn-off delay adjustable from 2 to 30 min.
- Humidity setpoint adjustable from 60 % up to 90 %.

Overall dimensions and mounting

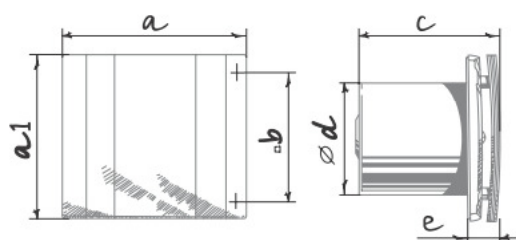

Dimensions [mm]	a	a1	b	c	∅ d	e
Quatro 100	171	151	108	128	100	32
Quatro 125	201	178	113	136	125	35
Quatro 150	236	207	165	157	150	38

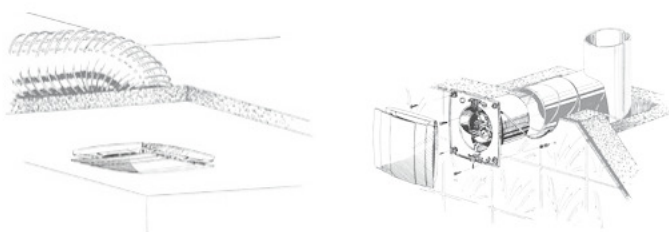


Designation key


Quatro	Platinum	100	S	Bivolt
Model	Color	Spigot diameter	Option	Voltage

Technical data

Model	Quatro 100	Quatro 125	Quatro 150
Voltage [V/Hz]	220-240/50	220-240/50	220-240/50
Power [W]	14	16	24
Current [A]	0.085	0.1	0.13
RPM [min ⁻¹]	2300	2400	2400
Air flow [m ³ /h (l/s)]	88 (24)	167 (46)	265 (74)
SFP [W/l/s]	0.57	0.34	0.33
Noise level [dBA]	33	34	37



Model	Quatro 100 Bivolt	Quatro 125 Bivolt	Quatro 150 Bivolt
Voltage [V/Hz]	127/60 220/60	127/60 220/60	127/60 220/60
Power [W]	10 9	16 15	25 25
Current [A]	0.115 0.054	0.119 0.102	0.175 0.338
RPM [min ⁻¹]	2500 2500	2400 2400	2350 2350
Air flow [m ³ /h (l/s)]	82 (23) 82 (23)	170 (47) 170 (47)	240 (67) 240 (67)
SFP [W/l/s]	0.44 0.40	0.34 0.32	0.37 0.37
Noise level [dBA]	33 33	35 35	37 37



Accessories

Duct system	Flexible air ducts	Grilles and hoods	Speed controllers	Clamps
BlauPlast	BlauFlex	Decor, GM	CDT E1.8 MCD 60/0.3	K, KZ